



Tlakové ztráty KORALINE s nucenou konvekcí

TLAKOVÉ ZTRÁTY



(výška/šířka)

KORALINE LV 15/18


Délka L [mm]	Hmotnostní průtok m [kg/h]											
	20	40	80	100	150	200	250	300	350	400	450	500
	Tlakové ztráty výměníku Δp [Pa]											
900	25	89	319	481	1015	1724	2601	3639	4834	6182	7680	9325
1000	27	97	347	524	1105	1878	2833	3963	5265	6733	8364	10156
1200	31	112	402	607	1281	2177	3283	4594	6102	7804	9695	11772
1400	35	127	456	688	1452	2466	3720	5205	6914	8842	10985	13337
1600	40	142	508	766	1617	2748	4145	5799	7704	9852	12239	14861
1800	43	156	559	843	1779	3023	4560	6380	8475	10838	13464	16348
2000	47	170	609	918	1938	3292	4966	6948	9230	11804	14664	17805
2200	51	183	658	992	2093	3556	5365	7506	9971	12751	15841	19234
2400	55	197	706	1064	2246	3816	5756	8054	10699	13682	16997	20638
2600	59	210	753	1136	2397	4072	6142	8593	11415	14599	18136	22021
2800	62	223	799	1206	2545	4324	6522	9125	12121	15502	19258	23383

(výška/šířka)


KORALINE LV 15/23

Délka L [mm]	Hmotnostní průtok m [kg/h]											
	20	40	80	100	150	200	250	300	350	400	450	500
	Tlakové ztráty výměníku Δp [Pa]											
900	25	88	308	461	958	1609	2406	3342	4413	5614	6942	8394
1000	29	101	351	525	1091	1833	2740	3806	5026	6394	7906	9560
1200	36	126	440	658	1366	2295	3432	4767	6295	8008	9902	11974
1400	44	153	532	796	1653	2776	4151	5767	7614	9687	11978	14484
1600	52	180	628	938	1949	3274	4896	6801	8979	11423	14125	17080
1800	60	208	726	1085	2254	3787	5662	7865	10385	13211	16337	19754
2000	68	237	827	1236	2568	4313	6449	8958	11828	15047	18606	22498
2200	76	267	930	1391	2888	4851	7254	10077	13305	16926	20930	25308
2400	85	297	1035	1548	3216	5402	8077	11220	14814	18846	23304	28179
2600	94	328	1143	1709	3550	5963	8916	12385	16353	20804	25725	31106
2800	103	359	1253	1873	3890	6534	9770	13572	17920	22797	28190	34087

KORALINE LV 15/18

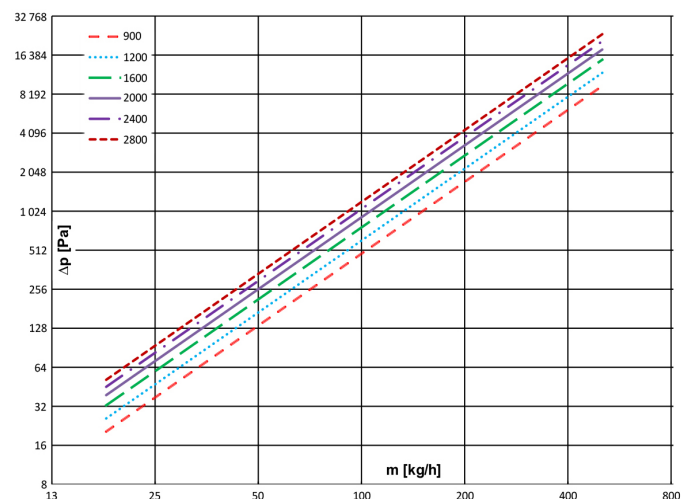

KORALINE LV 15/23

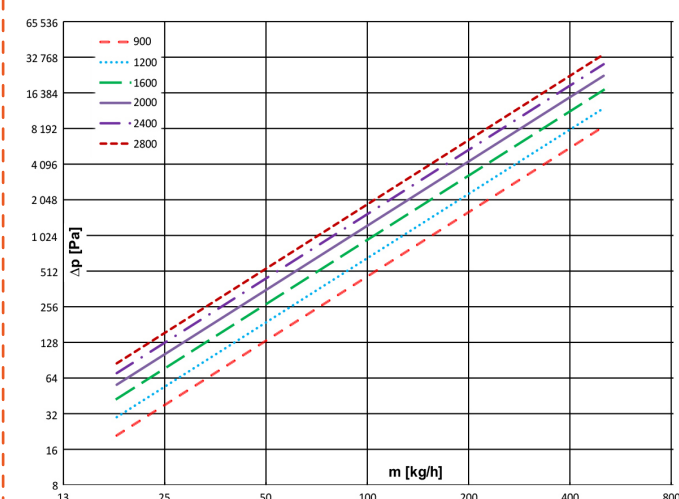

— 900 — 1200 — 1600 — 2000 — 2400 — 2800 délka (mm)

Technické změny vyhrazeny.